


2PC HIGHMOUNTING PAD SCREWED BALL VALVE

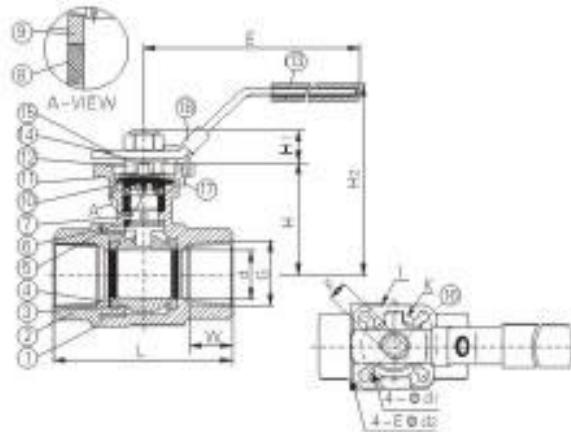

Feature

2PC Body Full Bore Size: 1/4" - 3" Anti-Static Device Working Pressure: 1000WOG

ISO5211 Direct Mounting Pad Threaded End: BSPT, NPT, DIN2999

Material List

NO	Part Name	Material	Q'TY
1	Body	CF8 CF8M	1
2	Bonnet	CF8 CF8M	1
3	Ball	SS304 SS316	1
4	Seat	PTFE/RPTFE	2
5	Gasket	PTFE	2
6	Stem Seal	PTFE/RPTFE	1
7	Stem	SS304 SS316	1
8	Packing	PTFE	1
9	Packing Gland	SS304	1
10	Belleville Washer	SS304	2
11	Spring Washer	SS304	1
12	Pin Nut	SS304	2
13	Handle Sleeve	SS304	1
14	Spring Washer	SS304	1
15	Handle	SS304	1
16	Stop Pin	SS304	1
17	Nut	SS304	1
18	Locking Device	SS304	1

Dimension List

NPS	d	E	d1	d2	F	G	H	H1	H2	L	W	ISO5211(K/I)
1/4"	11.5	139	6	6	9	1/4"NPT or BSP	38.6	6.6	73.6	53	15	F03/F04
3/8"	12.5	139	6	6	9	3/8"NPT or BSP	38.6	6.6	73.6	54	15	F03/F04
1/2"	15	139	6	6	9	1/2"NPT or BSP	38.6	6.6	73.6	56	16	F03/F04
3/4"	20	139	6	6	9	3/4"NPT or BSP	48.15	7.1	80.15	67	17	F03/F04
1"	25	165	6	7	11	1"NPT or BSP	56.6	10.9	95.4	80	21	F04/F05
1 1/4"	32	165	6	7	11	1 1/4"NPT or BSP	61.0	10.9	99.8	94	22	F04/F05
1 1/2"	38	215	7	9	14	1 1/2"NPT or BSP	77.5	13.9	126.3	101	22.5	F05/F07
2"	49	215	7	9	14	2"NPT or BSP	85.2	13.9	134	115	24	F05/F07
2 1/2"	65	263	10	12	17	2 1/2"NPT or BSP	108.7	16.8	166.7	155	31	F07/F10
3"	80	263	10	12	17	3"NPT or BSP	117.4	18.1	175.4	180	34	F07/F10